

edge/fit

Compact Network Appliance



EdgeServer - Fit Edition

A cloud managed edge platform providing advanced SDWAN, Security, QoS, and LAN services



Manages WAN sources and user data for optimal connectivity and controlled access



Cloud Managed, powerful user interface with Real-Time Metering and Analytics



Combine and control WAN sources with Advanced Routing and Bandwidth Bonding



Protect and Secure Network Integrity with Deep Packet Inspection (DPI), Traffic Policies, and VPN



Compact, Fanless

Industrial Design

- Small form factor (4.4" x 3.4" x 1.4")
- Hardened design, fanless, aluminum case
- Expandable ports
- 2x USB3
- 2x USB2
- GE compatible USB
- 5G modem over USB

Edge Applications

- Intuitive System Management locally or from the Cloud
- **Cloud Service Portal** for fleet management
- **Mobile App** management

Advanced QoS

- Deep Packet Inspection with Application, Domain, and IP filtering
- Rate, Quota, Priority management
- One-click client/group mgmt
- Priority / Shaping / Blocking

Security and performance

- Optimized Cellular/VSAT management via Cloud
- Integrated stateful firewall
- DPI + CF to secure the Internet

Local Area Network Management


- Connected and Routed Networks
- LAN, DHCP, DNS, Bonjour/M-DNS
- App, Device, and Group QoS

Software Defined Wide Area Network - SDWAN

- WAN Link Priority and Bonding
- Lossless Advance Bonding
- USA Internet
- VPN Services

Operations

- **Konnect** provides remote management to Edge networks
- Role-based access with SSO
- Cloud managed - using the Service Portal and Mobile App

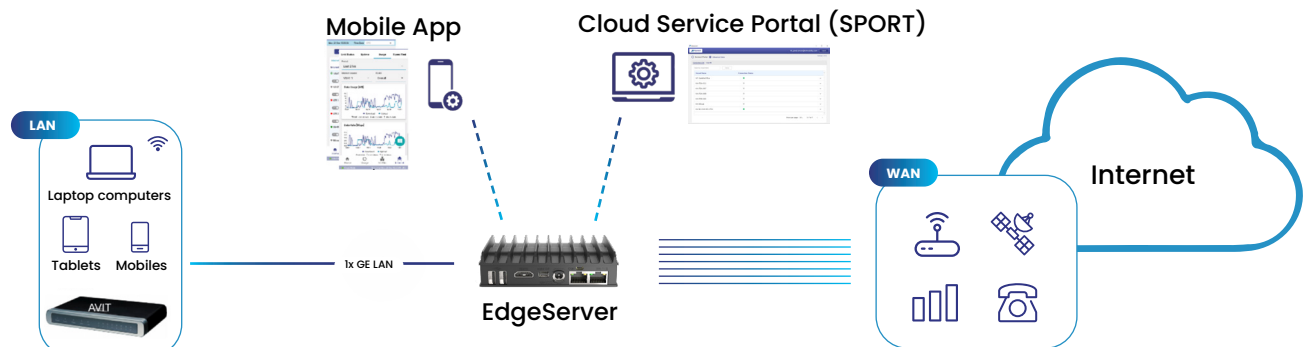

Quickly add Kognitive Edge as a Service (KaaS) to any network installation



Edge Fit – Back View



Edge Fit – Front View

WAN Management	Supports up to x WAN sources
Ethernet	2x GE ports, additional 4x GE ports using USB expansion
Network Configurability	Up to 500 Clients, 30 VLAN Networks; Stateful Firewall
Compute Power	Intel x86 Atom or Celeron class processor ; 8 GB RAM, 128 GB Storage
Expansion	2x USB 3.0 ports - 5G modem adapter supported
Cooling	Passive, Fanless - Silent
Mounting	Standalone / Universal / DIN mount kit available
Power	+12VDC (30W Max); 100-240 VAC, 50-60 Hz (AC/DC Power Supply Included)
Physical	4.4" x 3.4" x 1.4" / 111 x 85 x 35 mm - 2.25 lbs / 1 kg
Environmental	Operating temp: -10 to +50 C; Humidity up to 95%, non-condensing
Warranty	1 year limited