

edge/pro

Network Appliance



EdgeServer - Pro Edition

A cloud managed edge platform providing advanced SDWAN, Security, QoS, and LAN services



Manage up to 12 WAN sources and over 30 LAN networks



Cloud Managed, powerful user interface with Real-Time Metering and Analytics



Combine and control WAN sources with Advanced Routing and Bandwidth Bonding



Protect and Secure Network Integrity with Deep Packet Inspection (DPI), Traffic Policies, and VPN



Compact, Fanless - Rack or VESA mount

Industrial Design

- Small form factor (6"x5"x2")
- Hardened design, fanless, aluminum case
- VESA Mount kit
- 6x GE ports
- 4x USB3 expansion
 - GE compatible USB
 - 5G modem over USB

Edge Applications

- Intuitive System Management locally or from the Cloud
- **Cloud Service Portal** for fleet management
- **Mobile App** management

Advanced QoS

- Deep Packet Inspection with Application, Domain, and IP filtering
- Rate, Quota, Priority management
- One-click client/group mgmt
- Priority / Shaping / Blocking

Security and performance

- Optimized Cellular/VSAT management via Cloud
- Integrated stateful firewall
- DPI + CF to secure the Internet

Local Area Network Management


- Connected and Routed Networks
- LAN, DHCP, DNS, Bonjour/M-DNS
- App, Device, and Group QoS

Software Defined Wide Area Network - SDWAN

- WAN Link Priority and Bonding
- Lossless Advance Bonding
- USA Internet
- VPN Services

Operations

- **Kconnect** provides remote management to Edge networks
- Role-based access with SSO
- Cloud managed - using the Service Portal and Mobile App

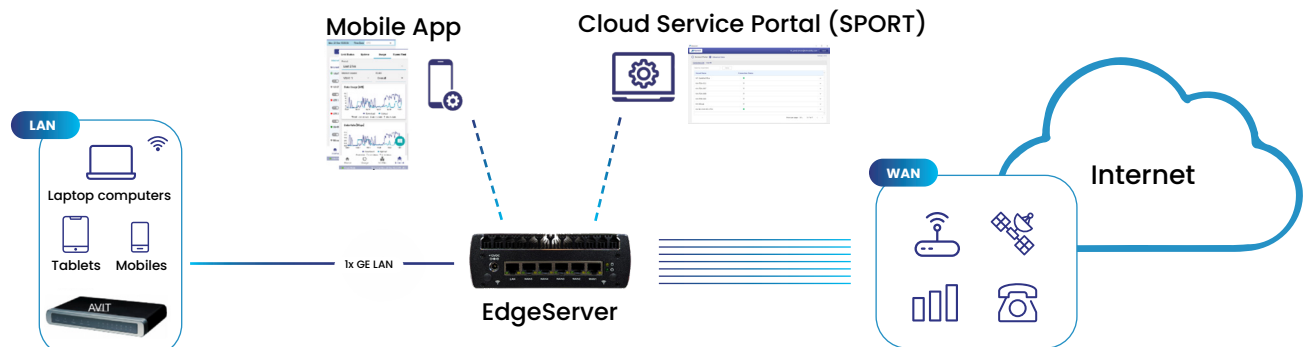



Edge Pro – Back View



Edge Pro – Front View

WAN Management	Supports up to 12x WAN sources
Ethernet	6x GE ports, additional 4x GE ports using USB expansion
Network Configurability	Up to 500 Clients, 30 VLAN Networks; Stateful Firewall
Compute Power	Intel i3 Dual Core 7020 at 2.3 GHz; 8 GB RAM, 128 GB Storage
Expansion	4x USB 3.0 ports – GE or 10GE ethernet; 5G modem adapter supported
Cooling	Passive, Fanless – Silent
Mounting	Standalone / VESA / Rack mount kit available
Power	+12VDC (50W Max); 100-240 VAC, 50-60 Hz (AC/DC Power Supply Included)
Physical	6.1" x 5" x 2.1" / 15.5 x 12.7 x 5.3 cm – 2.25 lbs / 1 kg
Environmental	Operating temp: -10 to +50 C; Humidity up to 95%, non-condensing
Warranty	1 year limited